
«PeakTech® P 1073» 600V AC/DC Smart-Multimeter with NCV & Live-Test

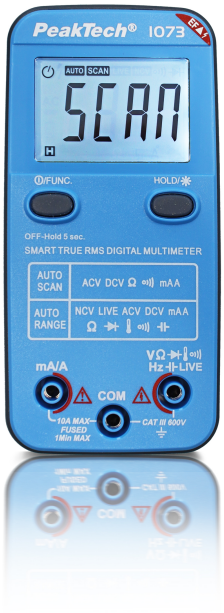

€20.75

Prices excl. VAT plus shipping costs and possibly lower value surcharge

Product number: P 1073

GTIN/EAN: 4250569407482

Description

Our new “Smart” digital multimeter combines state-of-the-art technology with an impressive range of functions in a compact design. It measures voltages up to 600V AC/DC, is CAT III certified and features True RMS for precise measurements with varying voltages. The integrated NCV voltage tester enables non-contact voltage detection, while the LIVE test reliably identifies phases and neutral conductors. Thanks to the automatic search of the measuring function, you no longer need a rotary selector switch. The multimeter automatically recognizes what is being measured and adjusts itself accordingly. The 4000-digit LCD display with blue backlighting ensures clear readability of the measured values and changes to red when measuring ranges are exceeded or the NCV voltage tester detects a voltage. In addition to the standard measurements for voltage, current (AC & DC), resistance, continuity, diode test and temperature, this multimeter also offers capacitance and frequency measurements.

Technical features

- Smart TrueRMS multimeter with automatic function selection
- Manual function selection possible at the touch of a button
- 3 3/4 digit LCD display with 4,000 counts
- Backlight (blue/red) and LED light
- Continuity test and diode test function
- Capacitance, temperature & frequency measurement

PeakTech Prüf- und Messtechnik GmbH
Gerstenstieg 4
DE-22926 Ahrensburg
www.peaktech.de

- Live test and NCV voltage tester
- Auto-Power-Off and battery status indicator
- Sturdy ABS plastic housing
- Safety: EN 61010-1, CAT III 600V
- Accessories: Test leads, thermocouple, batteries and operating instructions

Specifications

Auto-Scan:	■
Basic Accuracy DC:	+/- 0,5%
Battery:	1,5V AAA
Capacitance max.:	1 mF
Digital counts:	4.000
Display Type:	LCD
LED-lamp:	■
NCV:	■
Over voltage category:	CAT III 600 V
Range selection:	Auto
True RMS:	■
V DC max.:	600V
A AC max.:	10A
Hz max.:	4 kHz
OHM max.:	40 MΩ
Temp. max.:	1200 °C
Temp. min.:	-200 °C
mA DC max.:	4000 mA
V AC max.:	600 V
A DC max.:	10A
mA AC max.:	4000 mA

PeakTech Prüf- und Messtechnik GmbH
Gerstenstieg 4
DE-22926 Ahrensburg
www.peaktech.de